

MODEL NUMBER 10T19-S10

| ITEM NO. | PART DESCRIPTION | PART NUMBER | QUAN. |
|----------|--|-------------|-------|
| 1 | SUPPORT PIN 1 DIA. X 8 1/4 LG. | 5413-0000 | 4 |
| 2 | MAIN LEG BRACKET | 6118-1 | 4 |
| 3 | HEX. NUT 3/8-24NF | 54-0100 | 8 |
| 4 | SOC. SET SCREW 3/8-24NF X 1 3/4 LG. | 63-0110 | 8 |
| 5 | SUPPORT PIN 3/4 DIA. X 6 1/4 LG. | 5129-0001 | 4 |
| 6 | SPACER BAR 26 LG. | 5307-2600 | 2 |
| 7 | BRACE LEG BRACKET | 6118-2 | 4 |
| 8 | I-BEAM STL. 18" X 10' LG. | 769-0100 | 1 |
| 9 | KEY RING 2 1/4 DIA. | 82-0030 | 16 |
| 10 | CAUTION TAG No. 399 | 1969-RING | 12 |
| 11 | LOCK WASHER INT. TOOTH 3/4 | 58-0040 | 4 |
| 12 | HEX. NUT 3/4-10NC | 54-0040 | 4 |
| 13 | TROLLEY STOP ANGLE | 5132-0000 | 4 |
| 14 | HEX. HD. BOLT 3/4-10NC X 2 1/2 LG. | 51-0480 | 4 |
| 15 | BRACE LEG | 5135-0002 | 4 |
| 16 | MAIN LEG ASSEMBLY | 5106-0121 | 4 |
| 17 | UPPER MAIN LEG | 5155-0002 | 4 |
| 18 | ROLL PIN 5/32 X 3/4 LG. | 61-0300 | 4 |
| 19 | LOAD PIN CASTING | 5111-0000 | 4 |
| 20 | EXTENSION SPRING | 5117-0000 | 8 |
| 21 | LOWER MAIN LEG | 5157-0002 | 4 |
| 22 | SAFETY STOP ASSEMBLY | 5140-0000 | 4 |
| 23 | CASTER FRAME ASSEMBLY | 5107-0121 | 2 |
| 24 | SAFETY CABLE ASS'Y 130" LG. | 5028-0002 | 2 |
| 25 | OUTER CASTER FRAME TUBE | 5136-0002 | 2 |
| 26 | CASTER FRAME ADJUSTMENT PIN | 5139-0000 | 2 |
| 27 | INNER CASTER FRAME TUBE | 5137-0002 | 2 |
| 28 | HEX. HD. BOLT 1/2-13NC X 3 1/2 LG. | 51-0460 | 2 |
| 29 | CASTER PLATE | 5161-0000 | 4 |
| 30 | LOWER MAIN LEG PIN 1 DIA. X 6 7/16 LG. | 5018-0000 | 4 |
| 31 | HEX. HD. BOLT 1/2-13NC X 5 LG. | 51-0110 | 6 |
| 32 | HEX. HD. BOLT 1/2-13NC X 1 3/4 LG. | 51-0300 | 32 |
| 33 | CASTER WHEEL 10" DIA. | 47-0250 | 8 |
| 34 | LOCK WASHER INT. TOOTH 1/2 | 58-0020 | 40 |
| 35 | HEX. NUT 1/2-13NC | 54-0050 | 40 |
| 36 | COTTER PIN 1/4 X 2 LG. | 60-0040 | 4 |



Wallace Cranes Parts Location

Square Tube Tri-Adjustable 8 & 10 Ton



I-Beam
Assembly
Parts Location

Wallace Cranes
71 N Bacton Hill Rd.
Malvern, PA 19355



www.wallacecranes.com
800-553-5438
©2017 All rights reserved



Caster Frame
Assembly
Parts Location



Alternate
V-Groove Caster
Part No. 5141

Wallace Cranes
71 N Bacton Hill Rd.
Malvern, PA 19355




www.wallacecranes.com
800-553-5438
©2017 All rights reserved



WALLACE CRANES PORTABLE CRANE CANTILEVER CHART

GANTRY MODEL NUMBER: 10T19-S10
 I-BEAM: S18" X 54.7#/' X 10'
 I-BEAM LENGTH (OVERALL SPAN): 120 Inches
 MAXIMUM CANTILEVER DISTANCE (A): 30 Inches
 GANTRY RATED CAPACITY: 20,000 Lbs.
 MAXIMUM CANTILEVERED LOAD (B): 12000 Lbs.
 GANTRY WEIGHT: 2617 Lbs.
 I-BEAM WEIGHT: 547 Lbs.

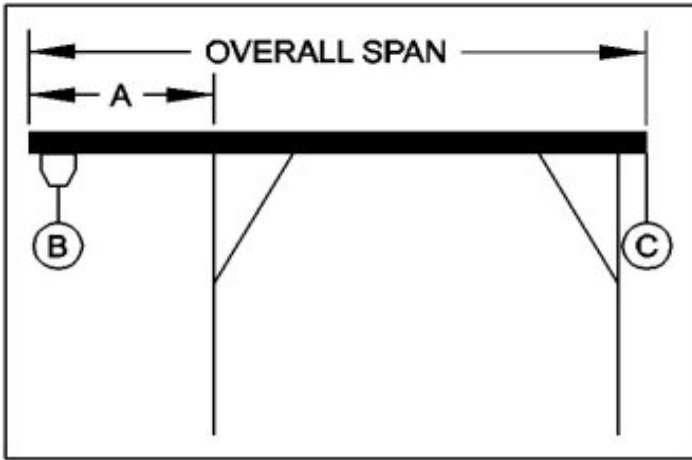

PROPER CANTILEVER PROCEDURES
 Required counterweight should not be supported by gantry caster frame.

Load and trolley should be able to freely traverse the I-beam through the main legs and brace legs of the gantry.

REQUIRED COUNTERWEIGHT AT [C]

| A | B | B | B | B | B | B | B | B |
|------|------|------|------|------|------|------|-------|-------|
| IN | 1500 | 3000 | 4500 | 6000 | 7500 | 9000 | 10500 | 12000 |
| FEET | LBS. | LBS. | LBS. | LBS. | LBS. | LBS. | LBS. | LBS. |
| 1 | 0 | 0 | 0 | 55 | 388 | 721 | 1055 | 1388 |
| 2 | 0 | 259 | 1009 | 1759 | 2509 | 3259 | 4009 | 4759 |
| 2.5 | 0 | 782 | 1782 | 2782 | 3782 | 4782 | 5782 | 6782 |