


WALLACE CRANES PORTABLE CRANE CANTILEVER CHART

GANTRY MODEL NUMBER: A2T21-A15

I-BEAM: A12" X 11.0#/' X 15'

I-BEAM LENGTH (OVERALL SPAN): 180 Inches
MAXIMUM CANTILEVER DISTANCE (A): 45 Inches
GANTRY RATED CAPACITY: 2000 Lbs.
MAXIMUM CANTILEVERED LOAD (B): 1200 Lbs.

GANTRY WEIGHT: 640 Lbs. I-BEAM WEIGHT: 165 Lbs.

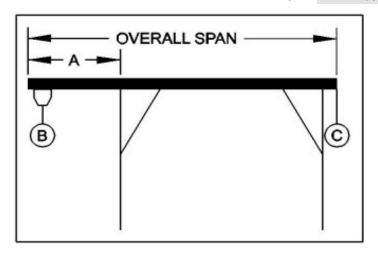

PROPER CANTILEVER PROCEDURES Required counterweight should not be supported by gantry caster frame.

Load and trolley should be able to freely traverse the I-beam through the main legs and brace legs of the gantry.

REQUIRED COUNTERWEIGHT AT [C]

Α	В	В	В	В	В	В
IN	200	400	600	800	1000	1200
FEET	LBS.	LBS.	LBS.	LBS.	LBS.	LBS.
1	0	0	0	0	0	0
2	0	0	0	0	0	61
3	0	0	0	100	200	300
3.75	0	0	107	240	374	507