




Adjustable Height Aluminum Tripod

Wallace Cranes offers portable aluminum adjustable tripods in 1-5 ton capacities. These lightweight models are easily transportable and can be assembled / disassembled quickly, making them an ideal choice for repair and maintenance jobs located off-site. In addition, our tripods are recommended to help set-up our larger cranes when a forklift or overhead lifting equipment are not available. All units include a standard base with lashing cable to prevent overspreading of the legs. Rubber base pad kits, mud base plate kits, and spike base kits are optional accessories available for every model.

Product Features

- Aluminum Construction
 - Sturdy, lightweight construction for quick set-up and take-down
 - Easily transportable
- Available in 1-ton to 5-ton capacities
- Adjustable heights available from 3'8" - 19'0"
- Machined alloy heads hold free-swiveling eye bolt which always hangs plumb
- Spring-loaded bolt (adjustable models only) locks in "out" position
- Legs rest securely on standard base - optional base accessories are available for different surfaces
- Lashing kit prevents legs from overspreading and can be used with all base accessories

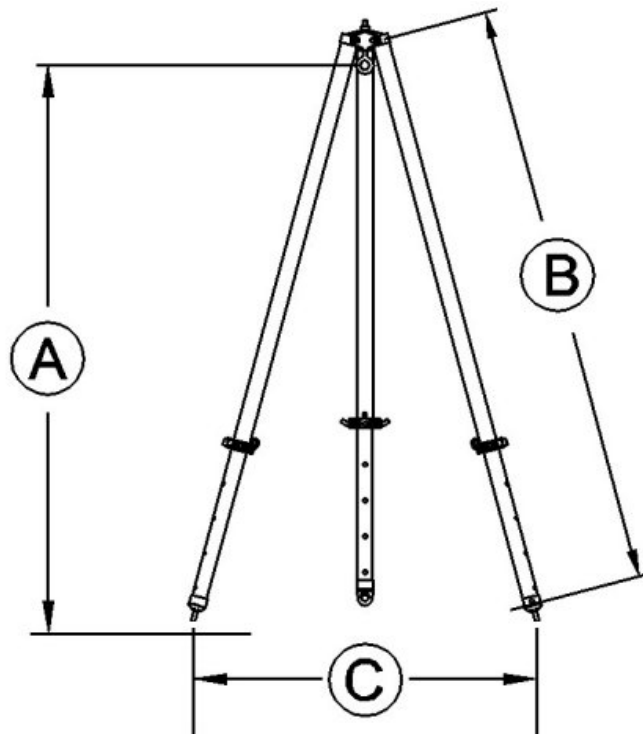

[Click to enlarge](#)

Heights under eyebolt are figured for optimum strength
(C) not exceeding 75% of adjusted (B).

Crane Sizes and Model Numbers

		A		B		C			
Rated Capacity	Model Number	Height - Eye Bolt to Floor		Overall Length		Distance Between Legs		Net Wt.	Spike Base Model Number
		Max.	Min.	Max.	Min.	Max.	Min.		
1 Ton	R3- 2 82	10'10"	7'1"	12'9"	8'9"	111"	63"	79	676
	H3- 2 142	19'0"	12'9"	21'9"	14'9"	192"	108"	216	1514
2 Ton	H3- 4 122	16'4"	11'0"	18'9"	12'9"	165"	93"	174	1514
3 Ton	R3- 6 42	5'6"	3'8"	6'9"	4'9"	57"	33"	57	676
	R3- 6 62	8'2"	5'6"	9'9"	6'9"	84"	48"	70	676
4 Ton	H3- 8 102	12'11"	8'5"	15'9"	10'9"	138"	78"	156	1514
5 Ton	H3- 10 62	7'6"	4'11"	9'9"	6'9"	84"	48"	111	1514
	H3- 10 82	10'3"	6'8"	12'9"	8'9"	111"	63"	124	1514

Note: Rated capacity is in thousands of pounds. Capacities de-rated at no additional charge.

Simply change the number **in red** to the required capacity when ordering.