




Adjustable Height Steel Tripod

Wallace Cranes offers steel adjustable portable tripods in 2-8 ton capacities. Most models are easily transportable and can be assembled/disassembled quickly making them an ideal choice for repair and maintenance jobs located off-site. In addition, our tripods are recommended to help set-up our larger cranes when a forklift or overhead lifting equipment is not available. All units include a standard base with lashing cable to prevent overspreading of the legs. Rubber Base Pad Kits, Mud Base Plate Kits, and Spike Base Kits are optional accessories available for every model.

Product Features

- Steel Construction
- Easily transportable
- Often used to help set-up our larger cranes when forklift or overhead lifting equipment is not available
- Available in 2-3-, 5-7-, and 8-ton capacities
- Adjustable heights available from 4'11" to 18'3"
 - Spring-loaded bolts permit height adjustments - they can be locked out until desired height is reached, then unlocked to engage automatically
 - Machined alloy head holds free-swiveling eye bolt which always hangs plumb
- Legs rest securely on standard bases - optional base accessories are available for different surfaces
 - Lashing kit prevents legs from overspreading and can be used with all of the optional base accessories

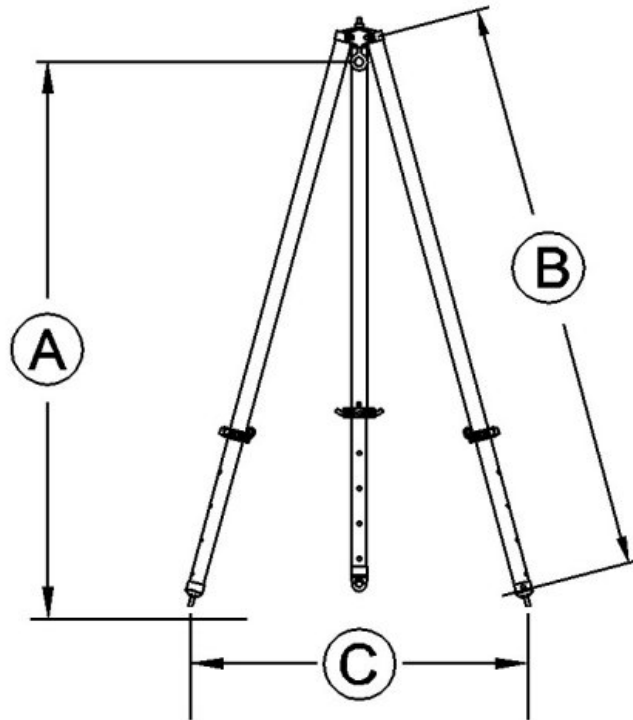

[Click to enlarge](#)

Heights under eyebolt are figured for optimum strength (C) not exceeding 75% of adjusted (B).

Crane Sizes and Model Numbers

Maximum Capacity	Model Number	A		B		C		Net Wt.	Spike Base Model Number
		Height - Eye Bolt to Floor		Overall Length		Distance Between Legs			
		Max.	Min.	Max.	Min.	Max.	Min.		
2-Ton	R3-4121	16' 3"	10' 10"	18' 9"	12' 9"	165"	93"	225	676
3-Ton	R3-6101	13' 7"	9' 1"	15' 9"	10' 9"	138"	78"	189	676
5-Ton	R3-1081	10' 10"	7' 1"	12' 9"	8' 9"	111"	63"	160	676
6-Ton	R3-1261	8' 2"	5' 6"	9' 9"	6' 9"	84"	48"	136	676
	H3-12141	18' 3"	12' 0"	21' 9"	14' 9"	192"	108"	411	1514
7-Ton	H3-1481	10' 3"	6' 8"	12' 9"	8' 9"	111"	63"	253	1514
	H3-14121	15' 7"	10' 3"	18' 9"	12' 9"	165"	93"	453	1514
8-Ton	H3-1661	7' 6"	4' 11"	9' 9"	6' 9"	84"	48"	210	1514
	H3-16101	12' 11"	8' 5"	15' 9"	10' 9"	138"	78"	385	1514

Note: Maximum capacity is in thousands of pounds. Capacities de-rated at no additional charge.

Simply change the number **in red** to required capacity when ordering.